

# Sheepylove Quicklime Girl Build Doc

Updated: 2026-03-02

It's woolly, it's greasy, it's Sheepylove.

**Disclaimer:** All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this document are for comparative purposes only. Use of these names, logos, and brands does not imply affiliation nor endorsement.

## README

**Sounds like Lollygagger FX Canaglia modded by Chuck D. Bones**

### Build notes

- Max gain is 70dB at 1kHz
- Max output is 8.3Vp-p
- Max clean output is 3.0Vp-p
- Q2 (BS170) may have variances in bias, may want to test a few
- The GAIN and DRIVE knobs may scratch, this is normal

Copyright: Sheepylove.com 2026-03-02


## Bill of Materials

Reference	Value	Quantity	Notes
C1	100u	1	
C2	15n	1	
C3,C4	100n	2	
C5	1u	1	
D1	1N5817	1	
D2	LED	1	
D3,D4	1N4148	2	
POT1	A50k	1	
POT2	C1k	1	
POT3	C10k	1	
Q1	2N2222A	1	
Q2	BS170	1	
R1	CLR	1	
R2,R6	100	2	
R3	1M	1	
R4	2k4	1	
R5	2M2	1	
R7	22k	1	
R8	47k	1	
R9,R10	10M	2	
R11	5k1	1	


Copyright: Sheepllove.com 2026-03-02

# PCB Images

## Top View

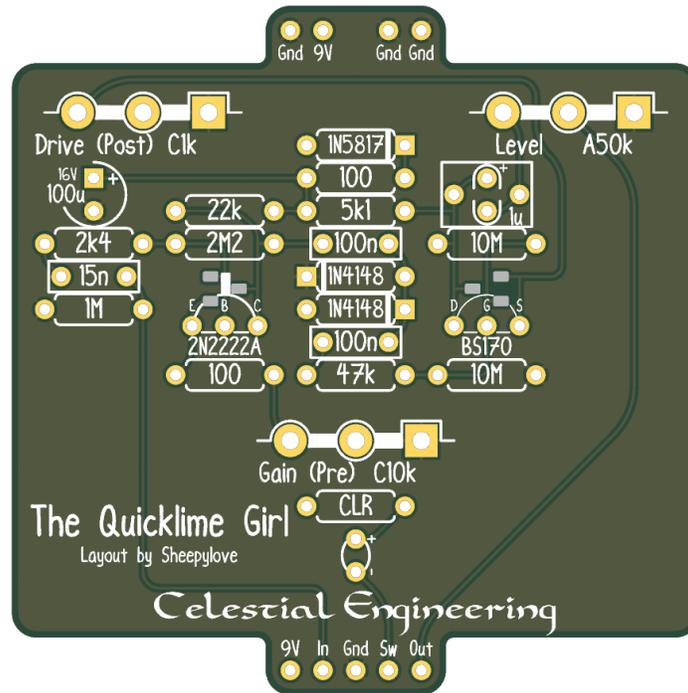


## Bottom View

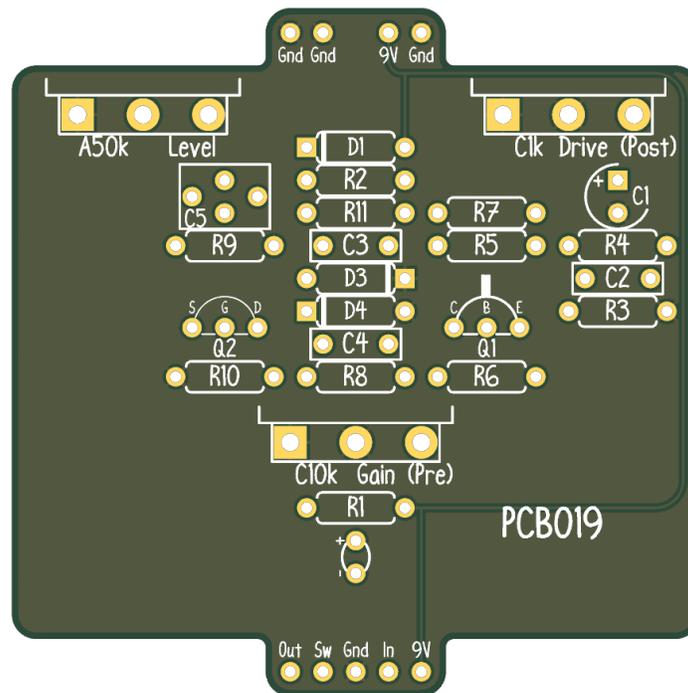

Copyright: Sheepllove.com 2026-03-02



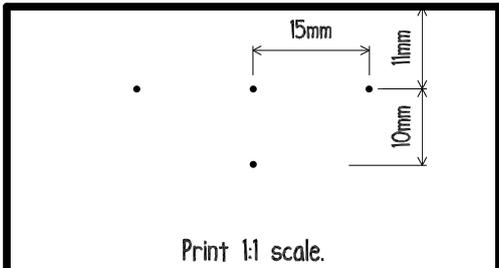

### Sheepylove Drill Template

-16.5	0	16.5
38.1	•	•
12.7	•	
0	+	
-12.7	• LED	
		
-45.1	• Footswitch	

Print 1:1 scale.  
All units are in millimeters.